let's feel the sound

www.lasmex.com

Anholtseweg 38
7091 HB Dinxperlo

LASMEX

Bluetooth speaker
and speakerphone
B300 User Manual

BeatBLOCC

BeatBLOCC

Bluetooth speaker
and speakerphone

Bluetooth speaker and speakerphone

B300 User Guide

Brief introduction

The B300 wireless Bluetooth stereo is a combination of fashion elements and new wireless technologies. Its compact design is fully in line with the needs of the lifestyle. Clear sound, deep bass and excellent performance as standard. It is not just an adorable ordinary speaker, it uses Bluetooth 3.0 technology, get rid of the shackles of the line has become a unique ornaments, but play the ultra-high quality music when you placed it any corner in the house, how enjoyable. As a Bluetooth speaker that wirelessly connect mobile phone, computer equipment, it is designed more user-friendly and smart, make you enjoy music easily and more comfortable. This new product is suitable for all A2DP stereo Bluetooth devices, including iPad®, iPhone®, iPod® Touch.
B300 Bluetooth speaker supporting A2DP allows you to enjoy wireless stereo music and can also be connected with the audio cable to play music online

Product structure diagram

Special note
The actual product images may vary, please prevail in kind
1.Multifunction button (long press to enter pairing mode)
2. Volume down
3. Volume up
4. Audio Input
5. USB charging jack
6. on/ off switch

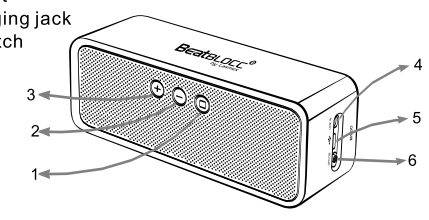

Basic operation

1. Turn on: In the off state, switch the button to the ON position, the blue LED flashes 5 times with an indication tone.
2. Turn off: Switch the button to the OFF position, the red LED flashes 5 times with an indication tone.
3. Pairing: Switch to the ON position, hold the multifunction button for about 6 seconds, the red and blue LEDs flash alternately, indicating that the Bluetooth speaker is in searching and matching state. You can operate your bluetooth-enabled mobile phone to match.
4. Connection: Connect your phone to the Bluetooth speaker after pairing is successful.
5. Answer a call: After connection is successful, short press the multifunction button to answer an incoming call.
6. End a call: When the call is connected successfully, short press the multifunction button to hang up, come with an indication tone.
7. Reject a call: Hold the multifunction button for 2 seconds to reject a call, you will hear an indication tone.

8. Adjust the volume: During a call, short press VOL+ button to increase volume one increment, and you will hear an indication tone when increase to maximum volume. Similarly, short press VOL- button to decrease the volume an increment, and also an indication tone when decrease to minimum volume.
9. Redial last number: Under standby mode, press multi-function button twice will redial the last outgoing number.
10. Voice dial: In the standby mode, hold the multifunction button for 3 seconds.(Need the support of the mobile phone Bluetooth)
11. Voice transfer: During a call, hold the multifunction button for 3 seconds until hear a tone, then the voice begin to be transfered from the Bluetooth speaker to your phone, the same operation can transfer the sound from your phone to a Bluetooth speaker
12. Microphone mute: Long press the VOL- button can switch to open and close the mute function, you will hear an indication tone after the operation was successful.
13. Pause/play: Short press the multifunction button to play or pause the music.
14. Previous/Next song: During playing music, long press VOL+ button to play previous song and press VOL- button to play next song.

15. Connect the B300 with your computer via USB data cable, you may listen to music by the B300, but microphone and volume control cannot be work under this situation.

Pairing B300 with Bluetooth devices

Bluetooth pairing is a professional term on the use of Bluetooth products: form a wireless connection between bluetooth-enabled devices through a simple operation.
For example, when use mobile phone with bluetooth speaker, it is necessary to operate the mobile phone bluetooth to search bluetooth devices , select and then connect wirelessly by PIN

The B300 speaker pairing steps are as follows:
1. Ensure the speaker is ON.
2. Hold the multifunction button for about 6 seconds until the LEDs are on and red and blue LEDs flash alternately.
3. Refer to the User manual of your phone to turn on the your phone' bluetooth function and search for bluetooth speaker.

Typically, setting steps involved to enter the settings, connection, or Bluetooth menu on the mobile phone , then select the found Bluetooth device option.
4. The phone will find the Bluetooth speaker and ask if you are ready with the pairing , press the OK or Confirm to pairing.
5. Enter password or PIN No.:0000 and press YES or Confirm.
(Remarks: After successful connection, the blue LED of B300 will flash and later flash once every 5 seconds. If the pairing has failed, LEDs are still flashing alternately, need re-pairing)

Making voice calls

If the voice recognition function is turned on, and use hands-free operation to connected to the speaker, then you can make calls by voice
1. Press the multifunction botton once, you will hear a tone to indicate the voice function activated
2. Say the name of the person you wish to call.
(Remarks: Speaker's voice call function is determined by the cell phone)

Battery charging and low-voltage alert

The red LED is on when the speaker is in charging, and it will turn off when charging is finished. The charge normally takes 2-3 hours.
When alert tone sounds once every 60 seconds and the red LED flashes once every 5 seconds, it indicates that the battery is run out, need to charge as soon as possible. It will automatically shut down if continue to use 5-10 minutes.

Remarks

1. Pairing mode will last 5 minutes.other mobile phone cannot search out the bluetooth speaker.
2.Re-connecting automatically(includes two cases)
a. If the bluetooth speaker turned off, it will connect to the pre-set bluetooth speaker automatically When turn on manually.
b.When the B300 disconnects to mobile phone owing to exceeding effective range(normally Link loss if exceed 10M), the bluetooth speaker will re-connect to mobile phone if back to effective range within about 10 minutes.
3.Support Bluetooth2.1 , (Do not need to enter the pairing code manually if test with Bluetooth2.1 dongle)

About battery

The Bluetooth speaker is powered by a rechargeable battery, new battery achieve the best performance only after two or three complete charge and discharge cycles. The battery can be charged and discharged hundreds of times , but it will eventually wear. When not charging , disconnect it with Bluetooth speaker. Do not leave a fully charged battery connected to a charging circuit since overcharging may shorten battery life. If a fully charged battery is left unused, the battery itself will be discharged after a period of time. If place the battery in hot or cold places , such as a closed car in summer or winter , will reduce the battery capacity and lifetime. Battery temperature should be maintained at between 15-25 centigrade. Bluetooth speaker battery too hot or cold may make it not work temporarily , even if the battery is fully charged. Battery performance is particularly limited in temperatures well below freezing . Do not dispose of batteries in a fire in order to avoid battery explosion. Impaired batteries may also explode.
The battery playtime is up to 6 hours

Bluetooth Lautsprecher mit Freisprechfunktion

B300 Handbuch

Kurzeinleitung

Das B300 ist ein Bluetoothlautsprecher der eine Symbiose modernstem Designs sowie neuester Wireless Technologie darstellt. Sein kompaktes Design überzeugt in ganzer Linie und bietet alles was gebraucht wird. Klarer Sound, tiefer Bass sowie eine exzellente Gesamtperformance bilden die Basis dieses Geräts. Es ist nicht einfach nur ein einfacher Lautsprecher, es verwendet aktuellste Bluetooth 3.0 Technologie, dies erlaubt es Ihnen das Gerät netzunabhängig zu betreiben und Sie sind somit nicht auf eine kleine dunkle Ecke mit einem Stromanschluss oder einer Audioquelle begrenzt, die Einsatzmöglichkeiten sind nahezu grenzenlos. Verbinden Sie das Gerät per Bluetooth mit Ihrem Mobiltelefon, Tablet, Smartphone oder auch mit Ihrem Computer, es lässt sich einfach mit jedem Gerät verbinden verbinden, dass den A2DP Standard unterstützt, dies beinhaltet u.a. auch das iPad®, das iPhone® oder auch den iPod® Touch.
Sie können das B300 natürlich auch für eine normale Kabelverbindung nutzen.

Produktaufbau

Hinweis
Die Produktabbildung können vom eigentlichen Produkt abweichen. Wir bitten um Ihr Verständnis
1.Multifunktionstaste (langes Drücken startet den Pairing Mode)
2. Lautstärke -
3. Lautstärke+
4. Audio Eingang
5. USB Ladeschnittstelle
6. Ein- / Ausschalter

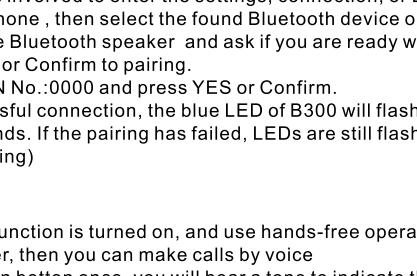

Basis Operationen

1. Einschalten: Betätigen Sie diesen Schalter, wenn sich das Gerät im ausgeschalteten Zustand befindet, die blaue LED blinkt 5x auf begleitet von einem Ton.
2. Ausschalten: Betätigen Sie diesen Schalter, wenn sich das Gerät im eingeschalteten Zustand befindet, die rote LED blinkt 5x auf begleitet von einem Ton.
3. Pairing: Schalten Sie das Gerät ein und drücken Sie die Multifunktionstaste für ca. 6 Sekunden, die rote und blaue LED blinken nun abwechselnd. Das Gerät befindet sich nun im Paarungsmodus und kann nun mit Ihrem Gerät gekoppelt werden
4. Verbindung: Verbinden Sie nun Ihr Telefon mit dem Bluetooth Lautsprecher nach erfolgreicher Paarung.
5. einen Anruf annehmen: Nach erfolgreicher Verbindung können Sie einfach 1x kurz auf den Multifunktionsknopf drücken, um den Anruf entgegenzunehmen.
6. Anruf beenden: Drücken Sie den Multifunktionsknopf um den Anruf zu beenden. Dies wird mit einem Signalton quittiert.
7. Anruf abweisen: Halten Sie den Multifunktionsknopf für 2 Sekunden, um einen Anruf abzuweisen. Sie werden ein Signalton hören.

8. Lautstärke anpassen: Während eines Anrufs können Sie durch Drücken der VOL + Taste die Lautstärke erhöhen. Es ertönt ein Signal, wenn die maximale Stufe erreicht ist. Genauso funktioniert es mit VOL -, um die Lautstärke während des Gesprächs zu reduzieren. Bei erreichter niedrigster Stufe ertönt ein Signal.
9. Wahlwiederholung: Drücken Sie im Standby Modus die Multifunktionstaste 2x um die letzte angerufene Nummer erneut zu wählen.
10. Sprachwahl: Halten Sie im Standby Modus die Multifunktionstaste für ca. 3 Sekunden, um die Sprachwahl zu aktivieren. (Diese Funktion muss von Ihrem Mobiltelefon unterstützt werden)
11. Sprachtransfer: Drücken Sie die Multifunktionstaste für ca. 3 Sekunden während des Gesprächs, um die Tonausgabe zwischen Telefon und Bluetooth Lautsprecher hin- und her zu schalten. (Diese Aktion wird durch ein Tonsignal quittiert)
12. Mikrofon Ton Aus: Durch langes Drücken der VOL - Taste können Sie das Mikro ein- bzw. ausschalten. Dies wird durch ein Tonsignal quittiert.
13. Pause/Play: Drücken Sie kurz auf die Multifunktionstaste, um Musik wiederzugeben oder zu pausieren.

14. vorheriger/nächster Song: Drücken Sie während der Musikwiedergabe lange auf die VOL + Taste, um zum nächsten Song zu springen, durch langes Drücken der VOL - Taste gelangen Sie zum vorherigen Track.
15. Verbinden Sie den B300 mit Ihrem Computer via USB Datenkabel, so können Sie das B300 als Lautsprecher nutzen, Mikro- und Lautstärkenfunktion funktionieren in diesem Modus nicht.

Paarung des B300 mit Bluetoothgeräten

Durch Paarung von zwei Bluetoothgeräten ermöglichen Sie eine schnurlose Datenverbindung von zwei Geräten.
Es muss so also bei beiden eingesetzten Geräten die Bluetoothfunktion aktiviert sein.
Es kann notwendig sein, zur Etablierung der Verbindung einen PIN einzugeben.
Zur Kopplung des B300 verfahren Sie wie folgt:
1. Stellen Sie sicher, dass der Lautsprecher aktiviert ist.
2. Halten Sie den Multifunktionsknopf für ca. 6 Sekunden bis die LEDs rot und blau in abwechselnder Frequenz blinken.
3. Konsultieren Sie das Handbuch Ihres Mobiltelefons zur Herstellung einer Bluetoothverbindung. Typischerweise befindet sich diese Option im Menü unter den

Einstellungen des Geräts. Führen Sie hier nun einen Suchlauf nach erfolgter Aktivierung der Bluetoothoption durch.
4. Das Telefon wird den Bluetoothlautsprecher finden und Sie fragen, ob Sie koppeln wollen. bestätigen Sie dies zur Kopplung.
5. Tragen Sie, wenn nachgefragt, den PIN 0000 ein und bestätigen Sie die Eingabe (**Hinweis:** Nach erfolgter Verbindung wird die blaue LED des B300 aufblinken, später wird sie in einer Frequenz von 5 Sekunden blinken. Bei fehlerhafter Kopplung werden die LEDs weiter blinken wie zuvor.)

Sprachanrufe tätigen

Wenn die Spracherkennungsfunktion aktiviert ist und die Geräte untereinanderander verbunden sind können Sie Sprachanrufe tätigen.
1. Drücken Sie den Multifunktionsknopf 1x, Sie werden ein Signal hören, das Ihnen quittiert, dass die Funktion bereit ist.
2. Sagen Sie nun den Namen der Person, die Sie anrufen möchten
(**Hinweis:** Diese Funktion hängt von der jeweiligen Funktion des Mobiltelefons ab)

Laden des Akkus und Anzeige des Batteriestands

Die rote LED leuchtet, wenn der Lautsprecher läd und sie schaltet sich ab, wenn das Gerät voll geladen ist. Dies dauert in der Regel 2-3 Stunden.
Wenn ein Signalton ca. alle 60 Sekunden ertönt und die rote LED ca. alle 5 Sekunden blinkt, dann ist dies ein Anzeichen dafür, dass der Akku geladen werden muss. Das Gerät schaltet sich nach gewisser Zeit automatisch ab, sollte bis dahin keine Verbindung zum Laden zustande gekommen sein, dies passiert in der Regel innerhalb von 5-10 Minuten.

Hinweise

1. Das Gerät bleibt für ca. 5 Minunten im Paarungsmodus, bei erfolgter Paarung oder nicht genutzter Verstreichung dieses Zeitraums ist keine Kopplung möglich
2.automatische Verbindung (zwei Möglichkeiten)
a. Das Gerät wird sich automatisch, sofern in Reichweite, mit dem zuletzt verbundenem Gerät verbinden nach dem Einschalten.

b. Sollte die Reichweite die maximale Entfernung überschreiten, so wird die Verbindung automatisch getrennt. Sie wird aber auch automatisch wieder hergestellt, sollte das Gerät wieder in Reichweite kommen, aber auch nur wenn dies innerhalb von 10 Minuten geschieht.
3. Bluetooth 2.1 Support (In diesem Fall muss der Kopplungs PIN in den meisten Fällen nicht eingegeben werden.)

Über den Akku

Das B300 wird über einen Akku mit Strom versorgt. Nach anfänglich 2-3 Ladevorgängen erreicht der Akku seine volle Kapazität. Der Akku hält mehrere hundert Ladezyklen, kann mit der Zeit aber auch an Kapazität verlieren. Trennen Sie das Gerät vom Netz, wenn die Ladung erfolgt ist. Ständiges Laden kann die Lebenszeit des Akkus verkürzen. Auch bei Nichtgebrauch entläd sich der Akku. Es kann also durchaus sein, dass nach einiger Zeit des Nichtgebrauchs der Akku vollständig entladen ist, obwohl das Gerät noch voll geladen war, als es zuletzt genutzt wurde. Verwenden Sie das Gerät nicht in extremen Umgebungen, halten Sie es von extremer Kälte oder auch extremer Wäre fern. Die Betriebstemperatur liegt zwischen 15-25°C.
Die Laufzeit des Akkus liegt bei bis zu 6 Stunden Spielzeit